



Edge banding machines Optimat KDN 330 - KDF 350 C

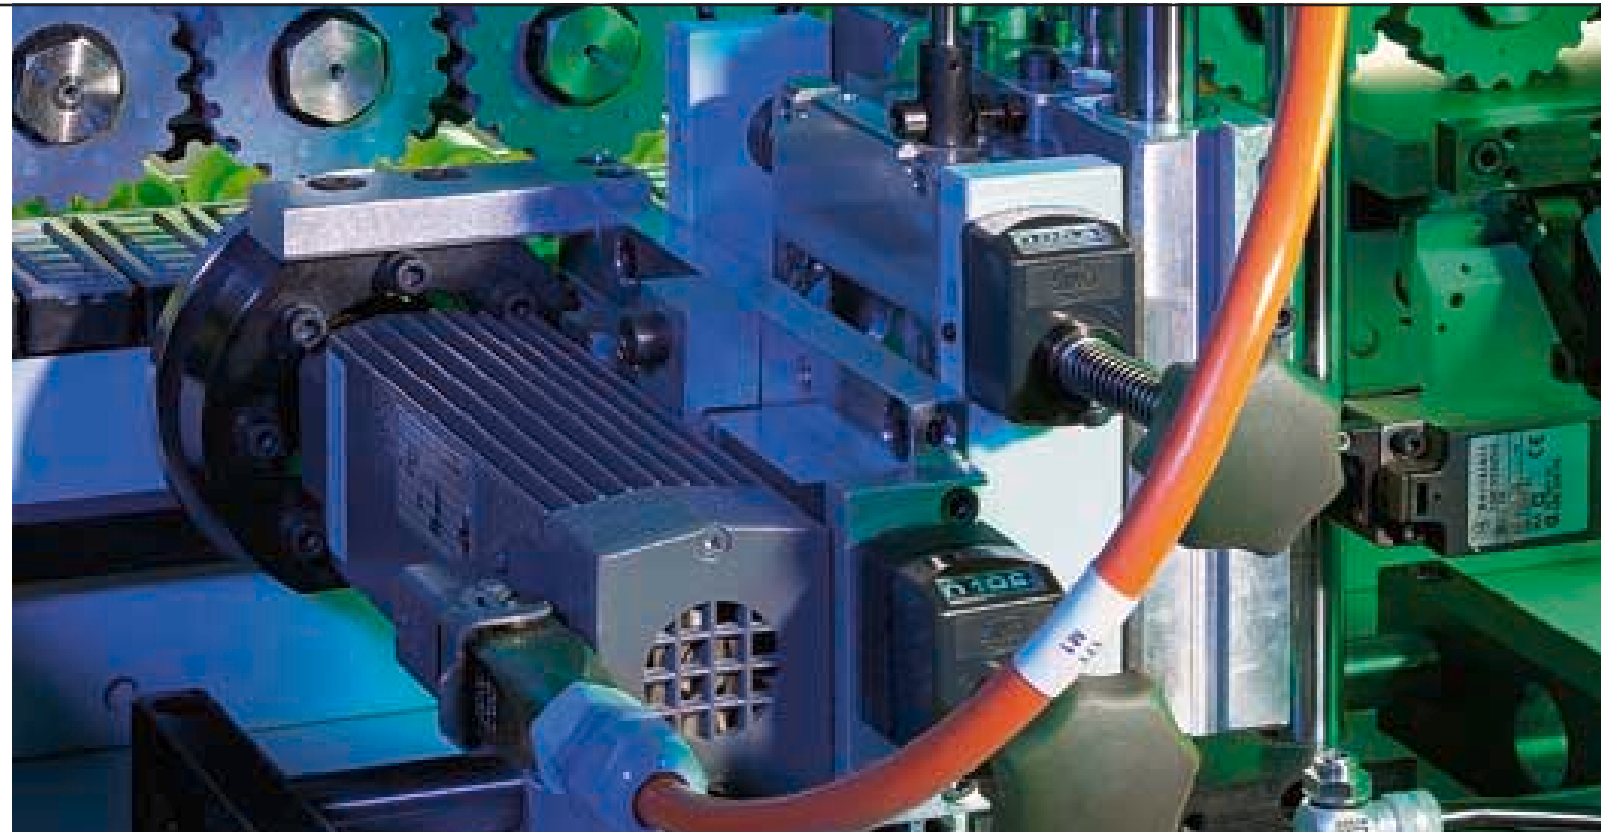

A member of the Homag Group of Companies

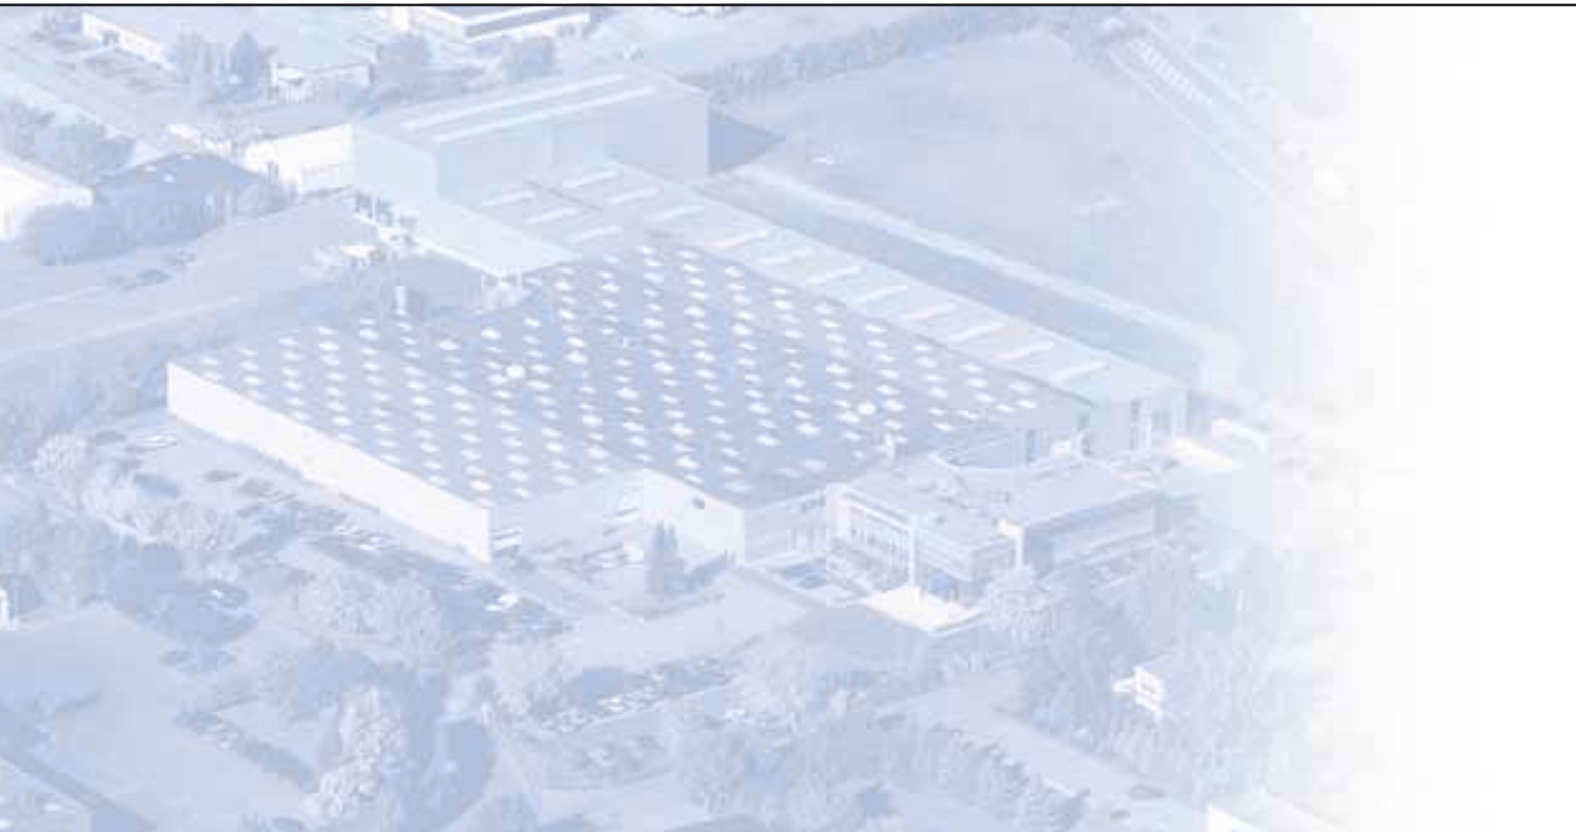

Brandt
Kantentechnik GmbH
Weststraße 2
D-32657 Lemgo
Tel. 05261/974-0
Fax 05261/6486
info@brandt.de
<http://www.brandt.de>

One series for all materials



Customised further development

More than 4000 satisfied customers worldwide use one of our former KD 50-series machines on a daily basis, in some cases under the harshest possible conditions.

The new types of the proven series offer an impressive number of additional detail improvements to further enhance customer benefit. By using joint trimming equipment in our compact range, an optimum edge quality can be achieved. The attractive machine design with its once again improved ergonomic features additionally increases this new series' attractive lines.

Safe and reliable gluing

The KDN/F 300 machines are equipped with easy to operate, leak-proof glue application systems that allow optimally closed glue joints. Commercially available hotmelt pellets are used.



KDF 340



KDN 350 C

Machine control system, processing units for KDN 330/335/340 + KDF 340

High performance processing units ensure flexible production

All processing units share high precision, forming the basis for optimum processing quality. Fast resetting, easy to maintain design and the high reliability standard are further features.

1. Joint trimming unit









Two trimming motors of 2,2kW, 12.000 rpm., rotating direction: synchronous/counter running. Equipped with diamond cutterheads as standard. For trimming of the workpiece edges to achieve optimum edge quality.

2. Gluing unit

All machines of the series KDN/F 300 are equipped with the leak-proof fast heat-up basin. Precise dosing allows optimum glue joints. The standard contact heating shoe guarantees an optimum gluing quality even under unfavourable conditions, e.g. non-heated workshop or workpiece temperature below the ambient temperature.

Machine controls

The models of the KDN/F 300 series are equipped with the high performance easy to operate electronic control system. The entire control panel is located within easy reach of the machine operator.

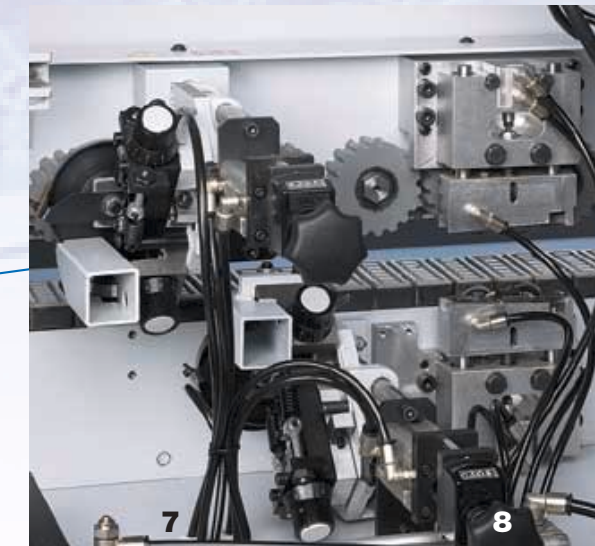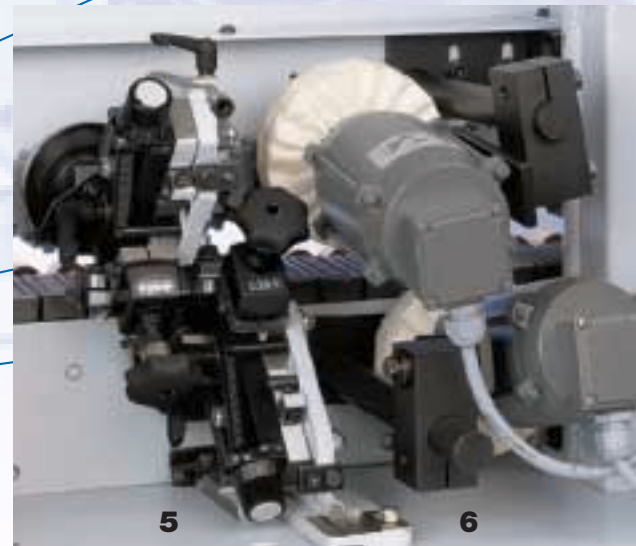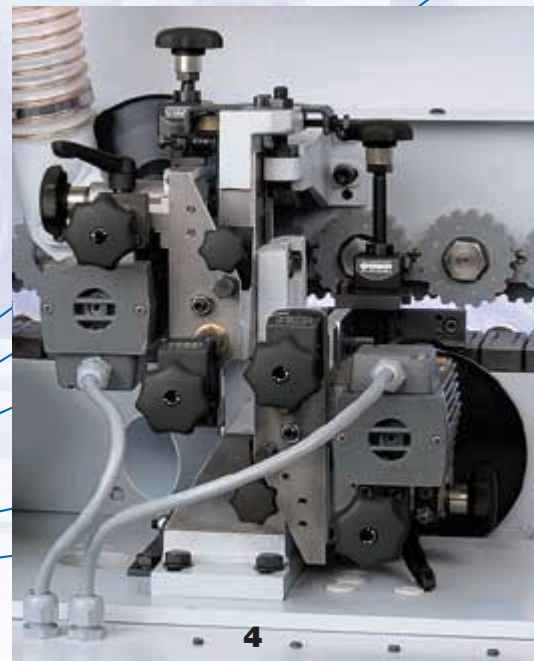

3. Trimming unit

Two trimming motors, each 0.18 kW, 12.000 rpm. High accuracy is guaranteed by the principle of the pulling cut. High precision linear guides comparable to those installed in complex CNC controlled machines are a further guarantee for perfect processing results.

4. Flush trimming unit

Equipped with two milling motors, each 0.27 kW, 12.000 rpm. Standard equipment including reversible tip combination milling tools for radius/straight edge permit fast and defined, i.e. repeatable settings.

5.+6. Combination of profile scraper and buffing unit

Profile scraper and buffing unit to give a smooth and perfect finish to pre-trimmed radii.

7.+8. Combination of profile and surface scraping units

Profile scraper to give a smooth finish to pre-trimmed radii, combined with a surface scraper for an optimum glue joint.

...the following features stand for the uniqueness of the Optimat KDN/F 300 series:

- Electronic, easy to operate machine controls
- Central lubrication of the chain track
- Precise dosing, leak-proof direct glue application
- Central top pressure and unit height adjustment
- HighTech linear guide of the trimming unit for maximum precision
- Electronic temperature control with timed, automatic lowering
- Electronic frequency changer, incl. safety motor brake for trimming and flush trimming motors
- Integrated line control for the capacitive control of processing functions
- Contact heating shoe for workpiece pre-heating with critical materials and low external temperatures
- ... and extremely short make-ready times



Machine control system, processing units KDN/F 350 C

High performance processing units ensure flexible production

All processing units share high precision, forming the basis for optimum processing quality. Fast resetting, easy to maintain design and the high reliability standard are further features.


1. Joint trimming unit

Two trimming motors of 2,2kW, 12.000 rpm., rotating direction: synchronous/counter running. Equipped with diamond cutterheads as standard. For trimming of the workpiece edges to achieve optimum edge quality.



2. Gluing unit

All machines of the series KDN/F 300 are equipped with the leak-proof fast heat-up basin. Precise dosing allows optimum glue joints. The standard contact heating shoe guarantees an optimum gluing quality even under unfavourable conditions, e.g. non-heated workshop or workpiece temperature below the ambient temperature.



2. Trimming unit

Two trimming motors, each 0.18 kW, 12.000 rpm. High accuracy is guaranteed by the principle of the pulling cut. High precision linear guides comparable to those installed in complex CNC controlled machines are a further guarantee for perfect processing results. Pneumatic adjustment for chamfer/straight edges.

3. Flush trimming unit

Equipped with two milling motors, each 0.27 kW, 12.000 rpm. Standard equipment including reversible tip combination milling tools for radius/straight edges permit fast and defined, i.e. repeatable settings. Two-point pneumatic adjustment of the top and bottom milling motor.

4. Contour trimming unit




top + bottom, for rounding corners of thick PVC edges 1 motor 0,35 kW, 12.000 rpm. Standard equipment with radius cutter tools $r = 3 \text{ mm}$.

5. Scraper unit

To finish pre-milled PVC edging using profiled cutters. Horizontal/vertical tracing. The model KDN 350 C is equipped with a pneumatically controlled engagement of the scraper unit.


6. Buffing unit

2 motors, equipped with molleton wheels, individually fitted and adjustable – for a perfect finish of the edge.

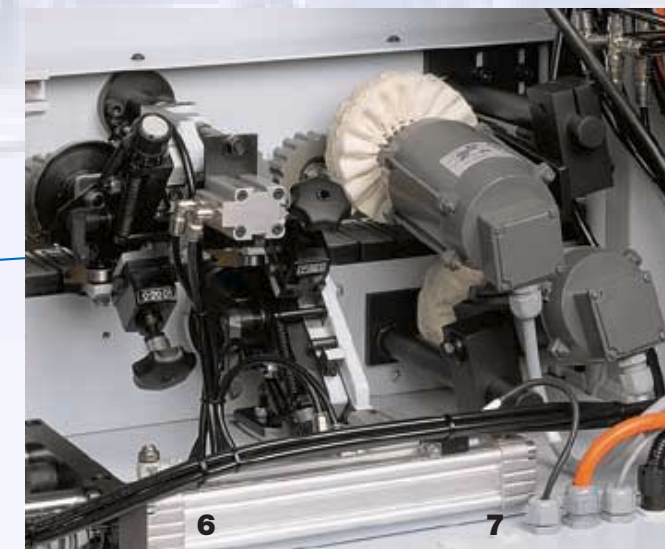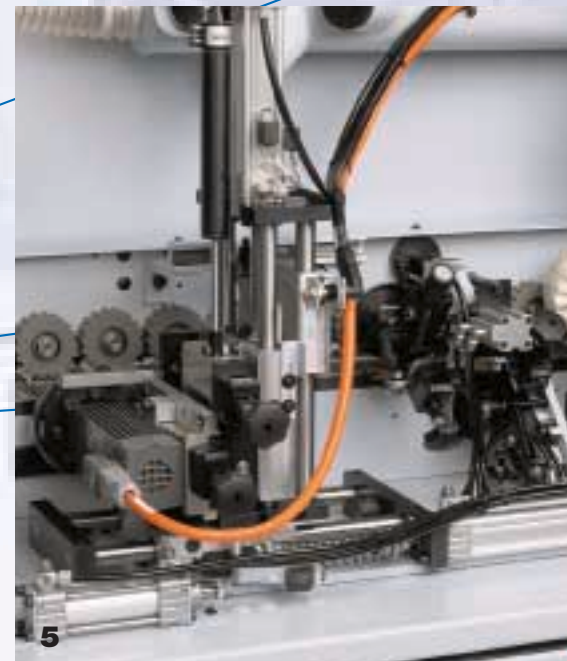

Machine controls


The models of the KDN/F 350 C series are equipped with the high performance PC 16 machine control system based on an industrial PC, the same that is used on high performance industrial machines.




...the following features stand for the uniqueness of the Optimat KDN/F 350 C:

- High capacity PC 16 machine controls on the basis of an industrial PC
- Central lubrication of the chain track
- Precise dosing, leak-proof direct glue application
- Central top pressure and unit height adjustment
- HighTech linear guide of the trimming unit for maximum precision
- Electronic temperature control with timed, automatic lowering
- Electronic frequency changer, incl. safety motor brake for trimming and flush trimming motors
- Integrated line control for the capacitive control of processing functions
- Contact heating shoe for workpiece pre-heating with critical materials and low external temperatures
- ... and extremely short make-ready times


Technical Data

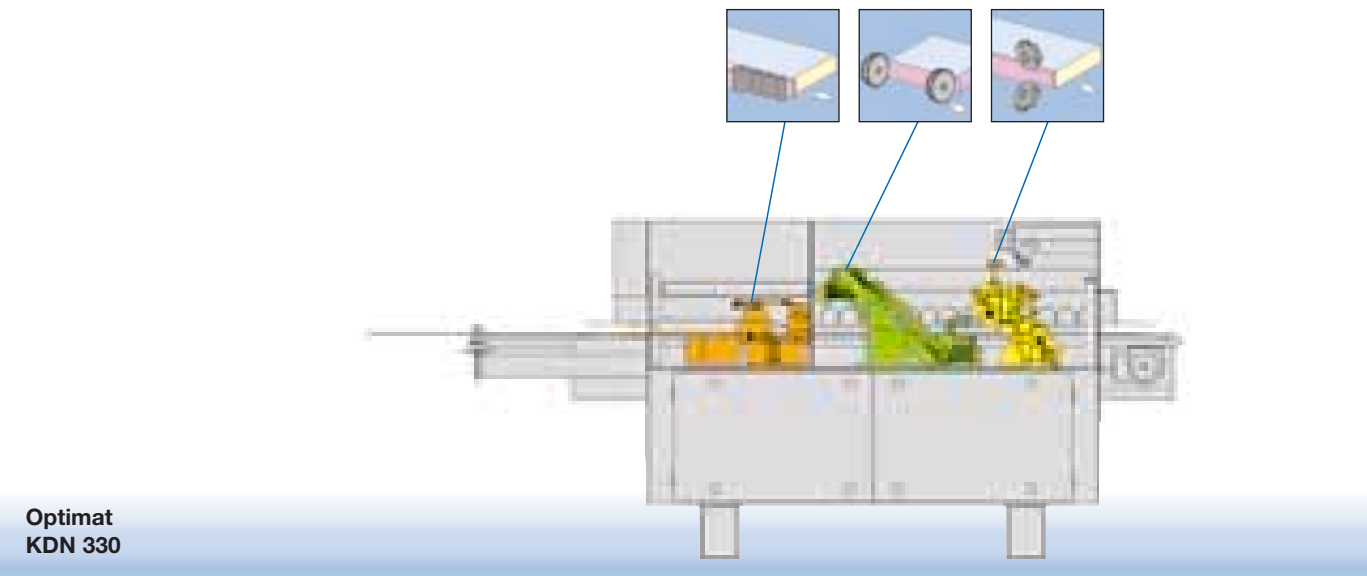


Optimat
KDN 330

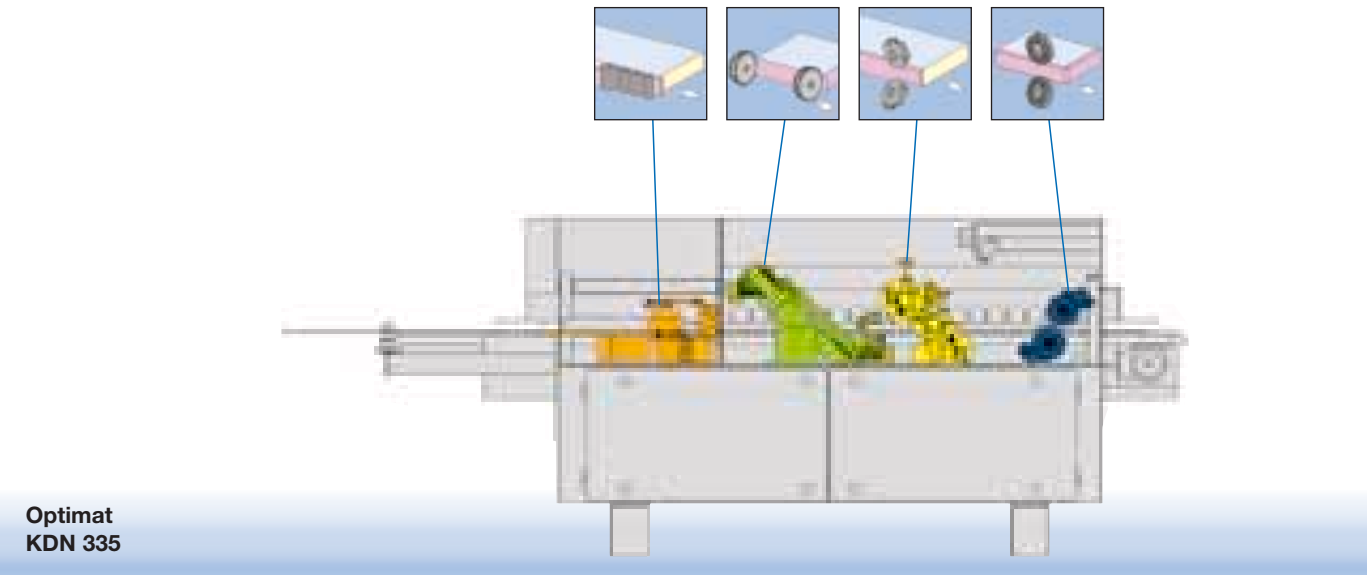


Optimat
KDN 335

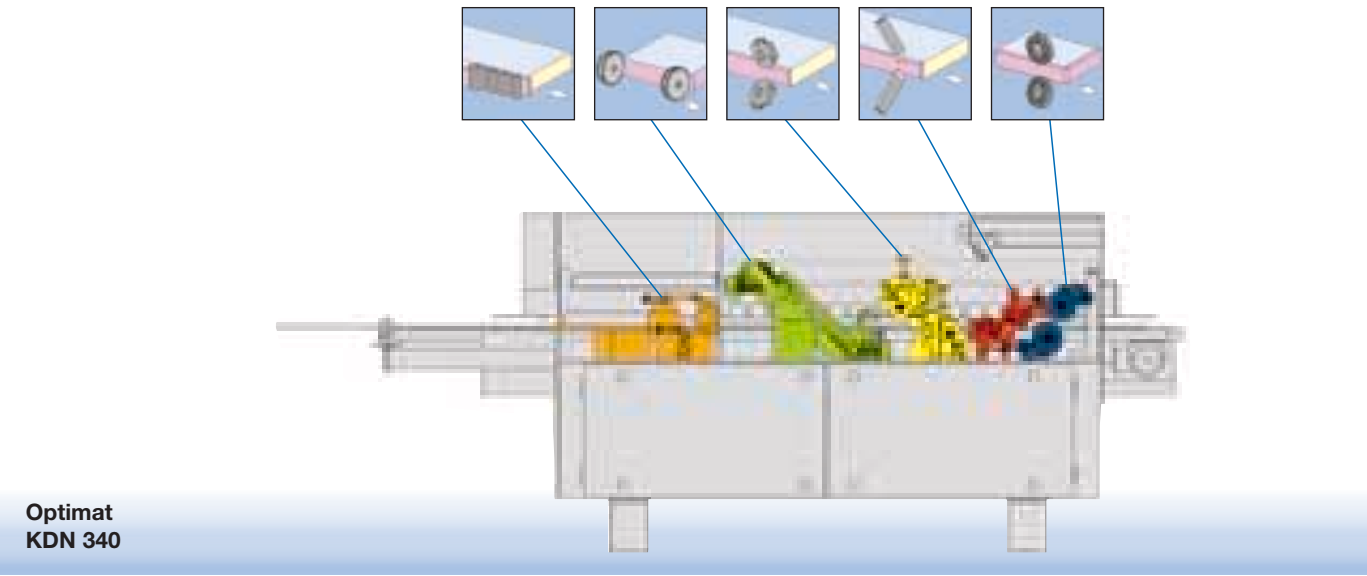


Optimat
KDN 340

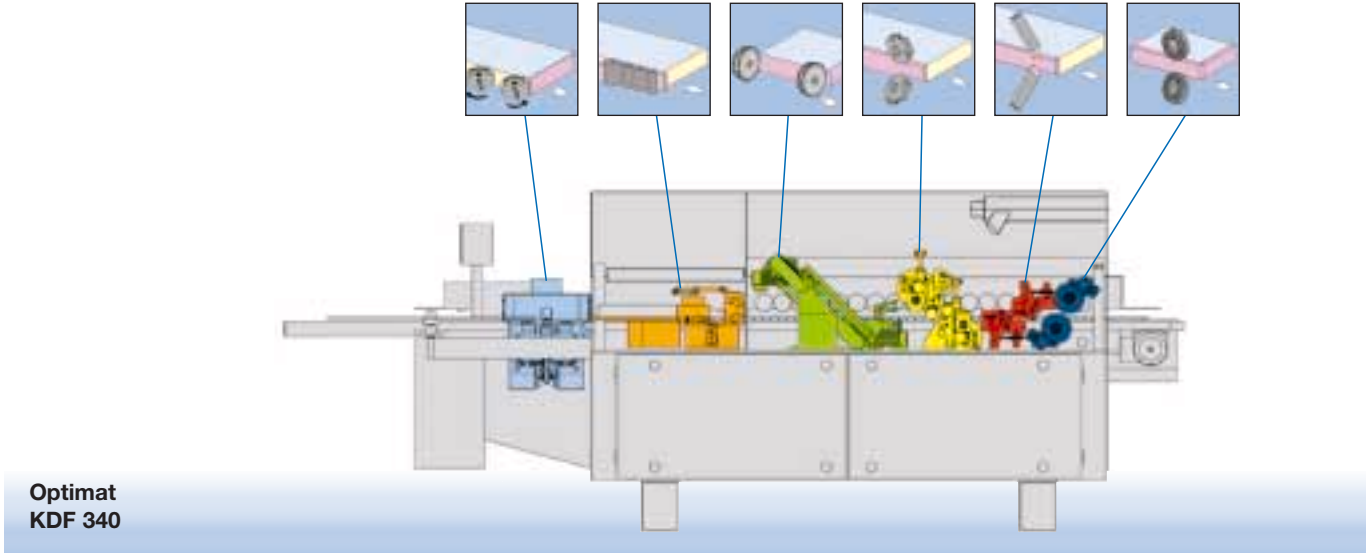

Optimat
KDF 340

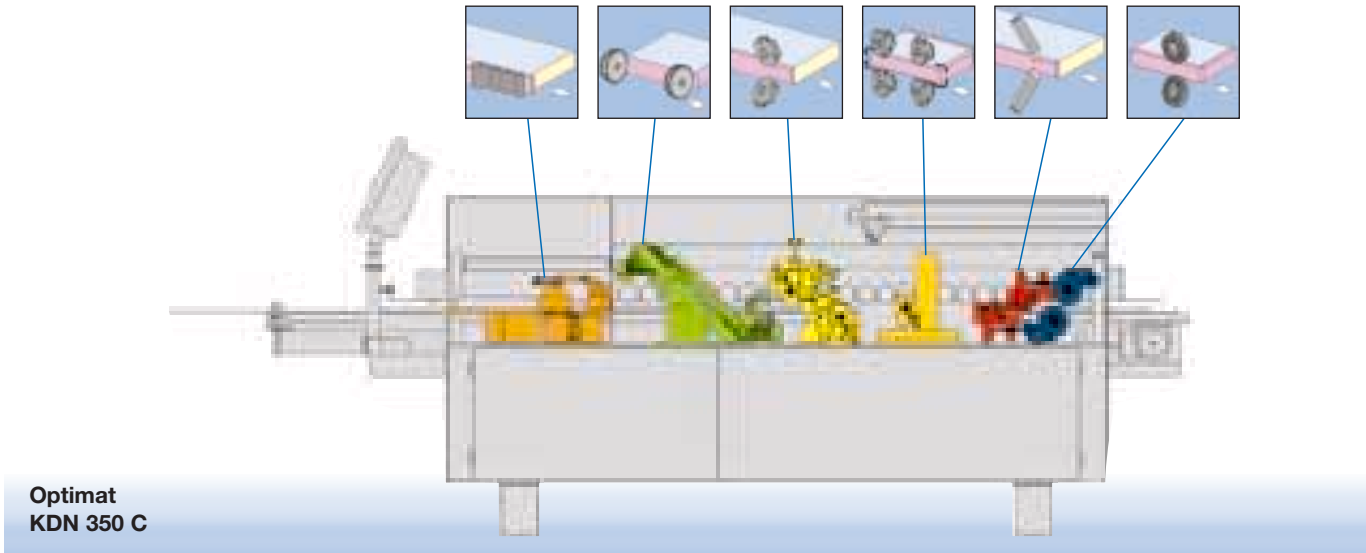

Optimat
KDN 350 C

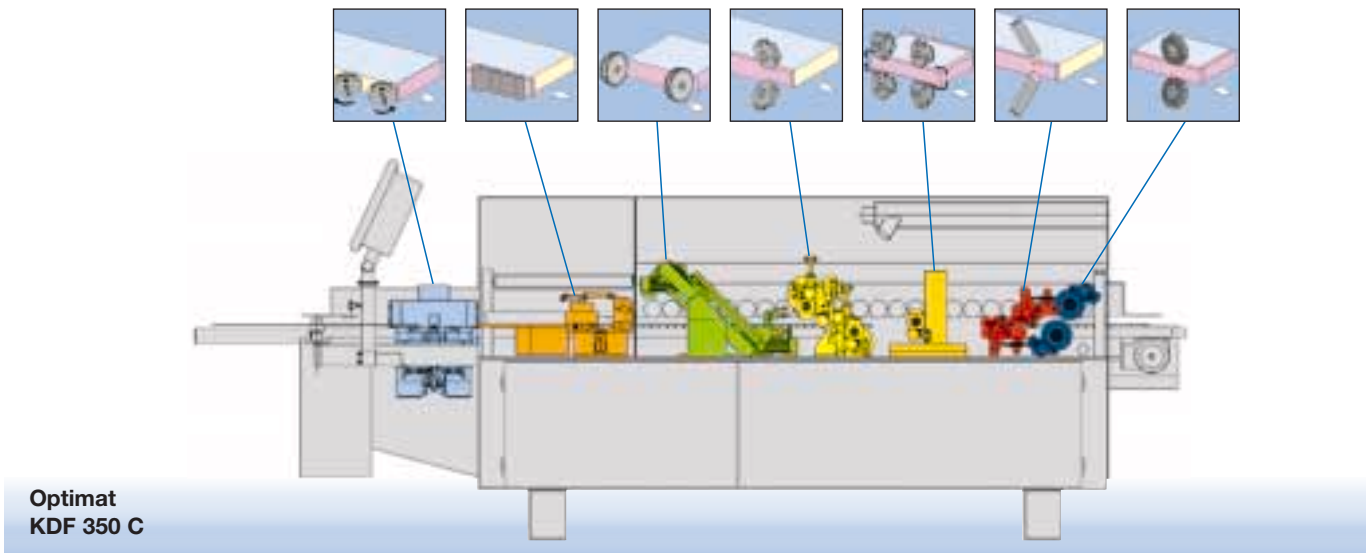


Optimat
KDF 350 C

	KDN 330	KDN 335	KDN 340	KDF 340	KDN 350C	KDF 350C
Workpiece thickness (mm)			8 - 50			
Edge thickness (mm)			0,4- 3 (max 3 x 30 / 1,0 x 55)			
Fixed length (mm)			max. 3 x 45			
Feed speedt (m/min)			11			
Electrical installation			400 V - 3 Ph. - 50 Hz.			
Connected valuet (kW)	4,0	5,0	5,0	10,0	5,5	10,5
Compressed air connection (bar)			6			
Weight (kg) approx.	750	850	900	1100	1050	1250
Machine length (mm) approx.	3150	3450	3450	3570	3800	3920

All rights for technical changes withheld. Individual machines shown could include options.



Contact heating shoe

As standard, all machines of the KDN/F 300 series are equipped with a contact heating shoe that – optionally activated – transfers contact heat into the board edge directly prior to the glue application to the workpiece edge, this notably optimising the gluing quality, especially with difficult edging materials or at very low ambient temperatures.

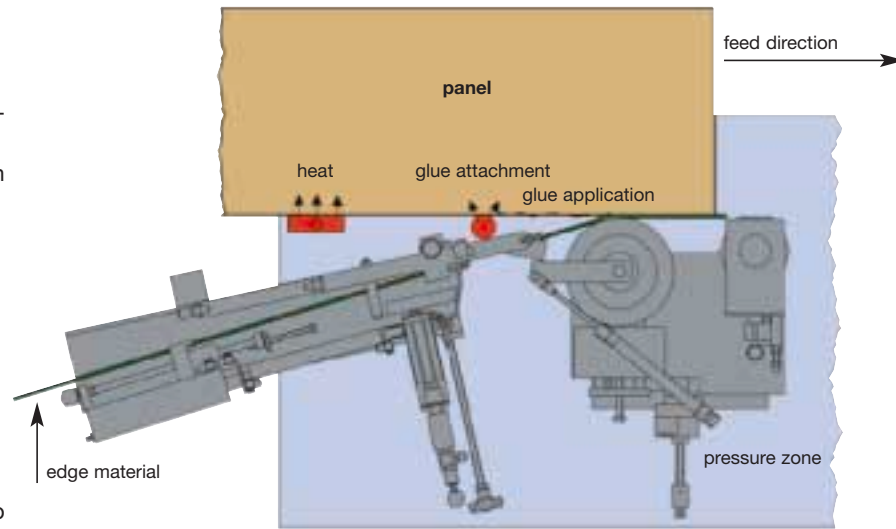

HighTech machine components

The proverbial Brandt quality is documented by the use of top of the line components. The illustrated linear guide element which in the same design is also used in highly dynamic CNC machines, is just one example for this.

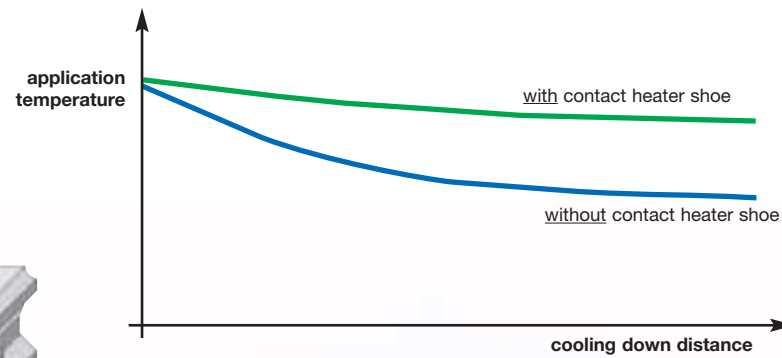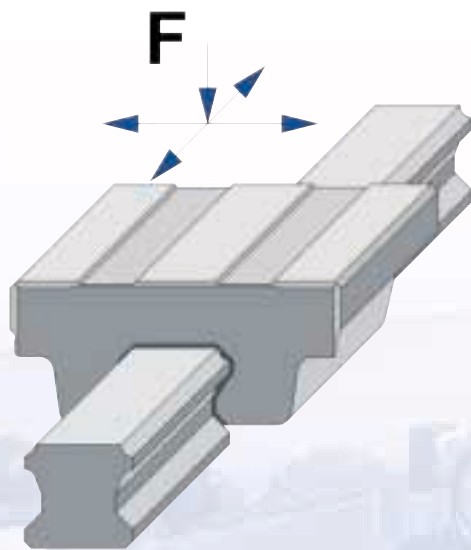

Brandt is present everywhere

The well established service, marketing and agencies network means short distances for you and the closest possible vicinity to the customer - world wide.

High degree of competence

Constant training of the sales and service personnel of our marketing partners in the Brandt training centre guarantees optimal service competence.

Same parts, simple handling

Many parts, control elements and subassemblies are identical for Homag Group machines and equipment. This makes operating them easier, simplifies the stock-keeping of spare parts and speeds up maintenance and service.

